

Instructions for the installation and description of the functions for *Yamaha* PW Powerdrive-Unit mid-motor design



WWW.BIKESPEED.DE



„Einfach. Schnell.“

Note about this printed manual

Congratulations on the purchase of your bikespeed-RS. You are holding the original manual for the bikespeed-RS and bikespeed-RSc for Bosch mid-mounted motors in your hands.

Printed manuals may not always be up to date for technical, logistical, and economic reasons. This applies, for example, to the listed compatible motors, displays and model years. You can find a current version of the manual for download on our homepage (<https://www.bikespeed.de>) If you are unsure, please feel free to contact us.

Product description

The bikespeed-RS is a simple and compact kit to bypass the speed limit of 25 km/h of Yamaha PW Powerdrive-Unit pedelec drives. The installation is completely invisible.

The bikespeed-RS is also available in a customizable version, called bikespeed-RSc (custom). You can find more information about this on page 11 of this manual. For the sake of simplicity and a better overview, the bikespeed-RSc is the same as the bikespeed-RS except for the personalization and therefore only the term bikespeed-RS is used in these instructions.

In contrast to other commercial tuning kits for pedelecs the bikespeed-RS displays the "real" speed on the tachometer instead of the half value. The data of the cycled distance, average/maximum speed, calculated range, ... are usable without any limitations. The levels of support as well as any special profile will be certainly maintained. Light activation is also

unnecessary, and you can use the tuning if you have an additional lighting system powered by the battery.

The tuning makes the final speed void, that means the terminal velocity is only limited by the power of the drive and the muscular strength invested.

We designed the installation as simple as we could. All the necessary connections are pluggable and consequently they can be removed without any traces.

Deactivation of the speed limit at 25 km/h is possible with the help of a key sequence on the actuator (see page 9, paragraph “description of functions”).

The tuning will adapt to your pedelec when it is activated. During this process the drive, the display and the size of the tires will be recognized automatically. The tuning is thus universally applicable, and you do not have to adjust anything.

Compatibility list

Please note that the following list may not be up to date. At the time of printing this manual, the bikespeed-RS is compatible with the following motors and displays. If updates are made to your pedelec, it is also possible that compatibility may no longer be given. You can find an up-to-date list on our homepage (<https://www.bikespeed.de>).

This bikespeed-RS is compatible with the following mid-range motors and displays:

- Yamaha PW Powerdrive Unit motors from year 2014 up to 2018
- Yamaha LED-Display from year 2014 up to 2018
- Yamaha LCD-Display from year 2014 up to 2018

Safety instructions, product liability and exclusion of liability

By using the bikespeed-RS on your pedelec, a relevant safety feature (the speed-dependent limitation of the motor power) is overridden. You must assume that your pedelec is not suitable for this and e.g., frame, brakes, chassis, tires, etc. are not designed for the higher speed. The conversion must be carried out by a specialist (e.g., the manufacturer of the pedelec or an authorized specialist workshop) who will also check other components on your pedelec accordingly and convert them if necessary.

Tuning an ordinary pedelec with a maximum speed of 25 km/h is not recommended for the ordinary user, as S-pedeles are intended for reaching higher speeds with the corresponding legal requirements, in particular the approval of the Federal Motor Transport Authority of your country (in Germany KBA/Kraftfahrtbundesamt).

We have not been able to conclusively clarify whether operation with the bikespeed-RS installed but deactivated is permitted on public roads. Therefore, we expressly point out that the mere presence of the tuning can constitute an offence in the sense of the Road traffic regulations or riding without insurance, §6 Compulsory Insurance Act!

A modified bicycle may only be used by an authorized, trained and instructed person. We assume the following level of training:

Function	User
Operator	Only persons trained and instructed about the special dangers
Maintenance personnel / technicians	Only the manufacturer of the pedelec or an authorized specialist workshop by persons with the appropriate expertise
Trainees or apprentices	the use is prohibited
General public	the use is prohibited

Trained users should be made aware of the increased risk when using the modified pedelec:

Increased risk of impact: Due to the increased speed, obstacles are reached more quickly, and reaction time may not be sufficient to brake or swerve in time.

Increased braking distance: The increased speed also increases the braking distance. Furthermore, it must be checked before use whether the installed brake system is designed for the increased speed.

Increased risk of discomfort / neurological disorders: Due to the increased speed, vibrations can increase, which can lead to discomfort. Furthermore, due to the increased speed, more concentration is required from the user. This can lead to increased stress during use. Therefore, only persons who do not have any physical, mental, or neurological disorders may be users.

Possible loss of control: The increased speed can make it easier to lose control of the pedelec. The user must therefore be of age and equipped

with suitable protective clothing (helmet, protectors, etc.) to be adequately protected from injury in the event of a fall.

Modified bicycles may only be used on fenced private property. Furthermore, it must be ensured before use that there is sufficient space to obstacles on the route. (e.g., stones, trees, water areas, etc.).

No other persons are allowed on the fenced off area during use and precautions must be taken to ensure that no other person can enter the area during use.

The converted pedelec must be equipped with a warning notice that is clearly visible before the pedelec is used. The warning notice must prohibit the use by untrained persons and outside the fenced private area.

Operation on public roads is expressly prohibited by the Road traffic regulations!

The bikespeed-RS is installed and operated at your own responsibility; any liability for damage or consequential damage, as well as legal consequences for bikespeed or the manufacturer of the pedelec are excluded in any case.

Before using the system, please enquire about the legal consequences that may arise for you because of the installation.

We expressly point out that the use of bikespeed RS will result in the loss of the manufacturer's warranty. Furthermore, the manufacturer and bikespeed have no product liability for your pedelec.

Bikespeed or the manufacturer of your pedelec cannot guarantee that brakes, frame, chassis, tires, etc. are designed for the use of the tuning part.

Before use, the more highly stressed components of the pedelec (e.g., frame, brakes, tires, bearings, and suspension, etc.) must be tuned by the manufacturer or tested and approved by a suitable testing Centre (e.g., TÜV or Dekra). If the speed is doubled, it must be considered that the acting forces are quadrupled. In accordance with EN 15194, it must therefore be checked that the modified pedelec still meets the requirements. It is to be assumed that the higher stress is permanently given.

If a component of the pedelec cannot withstand the higher stress, it must be upgraded by the manufacturer of the pedelec or by an authorized specialist workshop, or the bikespeed-RS must not be installed.

Description of functions

The bikespeed-RS removes the limit at 25 km/h of your pedelec. All other features and functions of your bike remain as usual. This also includes the protective measures installed by the manufacturer (e.g., short circuit, overcurrent, power, torque, temperature, etc.), except for the safety device for limiting the maximum speed.

After activating your pedelec the display will show an animation of the battery's capacity. If the capacity runs from empty to full your pedelec will support you with motor power even if you exceed 25 km/h. If the capacity runs from full to empty the support will end at 25 km/h.

To switch on or off the support above 25 km/h please change the level of support down, up, down, and up again. If the procedure was successful, you will see the animation of the battery's capacity once more just like when you activate your pedelec and this way you are informed about the current setting.

Here is an example beginning on the "Std" level:

Pushbutton down (new level: "Eco")

Pushbutton up (new level: "Std")

Pushbutton down (new level: "Eco")

Pushbutton up (new level: "Std")

Please enter the combination quickly without a pause of 3 seconds between two keys. Repeat the procedure, if necessary, in order to obtain the desired setting.

If you have a bikespeed-RSc you use the combination you chose beforehand. (see page 11, paragraph „Description of the custom-variant“)

Furthermore, please note that you must switch the stages to enter the combination. For example, you cannot enter a combination that starts with the "down" key from the "off" level (or a combination that starts with the "up" key from the highest level). If the combination consists of several keys in one direction, you must therefore start the input at a sufficiently low or sufficiently high level.

Hint for the odometer

Please note that after the deinstallation of the bikespeed-RS your odometer may show a lower value under certain circumstances like you are traveled with your bike. This behavior is caused by the design and not a fault.

Please note this primarily when selling your bike.

Description of the *custom-variant* (bikespeed-RSc)

After many requests of our customers, we offer a new feature of the bikespeed-RS additionally. The individual customer configuration gives you the opportunity with you selectable personal setting to protect your tuning for discovering.

With your individual key combination, you can decide if the tuning should be displayed its status with an animation above the battery indicator or not. The tuning can be switched on/off at any time, and you can control the behavior (tuning on/off) after on switching your bike.

The configuration options can be found in the shop on our website. There all possibilities are described with many tips and videos.

If you are interested to upgrade your standard bikespeed RS on a custom version, you can feel free to contact us.

Help in case of problems

If your bikespeed-RS does not work correctly at any given time, please check the following steps in order to help yourself.

Should you still have problems please write an email before sending back the bikespeed-RS.

Cause	Solution
- bicycle does not start or deactivates itself immediately	- Please check whether the display and battery are properly engaged in the bracket. - Please check the 4-pole connector from the tuning to the motor and to the display.
- no animation visible when starting the bicycle	- Please check if the service-mode is activated as by entering the combination. - Check the 3-pole connector from the tuning to the motor
- no support or rather only briefly when starting - no speed-indication (0 km/h)	- Please check the 3-pole connector from the tuning to the motor and to the speed-sensor - Check the magnet on the sensor and align it anew - Test the magnet by holding another magnet in front of the sensor for a second and take it away again several times.
- support only until up to 25 km/h are reached	- Check if the tuning is activated.
- bikespeed-RS (c) cannot switched on or off	- Keep in mind you have to switch the stages to enter the combination. Please start in a sufficient high or low stage.

Continue next page.

Help in case of problems (continue)

In our experience, the cause for problems most often are connectors which are not correctly plugged in. Therefore, please always check if they are set correctly and plugged in the correct socket. Please insert the connectors as far as you cannot see the seals anymore. If that is not possible, please apply some Vaseline onto the seals for greasing. The plugs are coded and only fit in one direction. Please do not use force!

Notes on installation, removal, storage, maintenance, and use

Installation, repair, commissioning, and decommissioning may only be carried out by the manufacturer of the pedelec or an authorized specialist workshop.

During installation, ensure that the ergonomic principle and functionality of the pedelec are not changed or impaired.

The protection class of the bikespeed-RS is IP64. The bikespeed-RS does not require a separate power source. It is supplied with energy from the battery of the pedelec in which the tuning is installed. This battery is charged via the power supply unit provided by the manufacturer of the pedelec.

No maintenance or service is required on the bikespeed-RS. After decommissioning, no special precautions need to be taken to put the product back into operation.

If the product is stored in a dismantled state, this must be done in a dry place between 0 and 40 degrees Celsius and 30 to 70 % relative humidity.

Use in the installed state may only be carried out by specially trained and adult users without physical and physical limitations.

The use is not limited in time but may only take place as long as the physical and mental condition of the user allows to operate the pedelec under full concentration.

Example installation on a Haibike AllMtn RX

Since we cannot provide detailed installation instructions for every bike available on the market with this motor and display, we have decided to use this installation example. This example will give you an overview of the work to be done and you can transfer it to your bike. If you still have questions, please feel free to contact us at any time.

For the installation of the bikespeed-RS two of the three screws holding the motor must be removed; the motor can easily be folded down, and all of the connectors become accessible.

Required tools:

- Allen key (size 6)
- possibly further Allen key sizes for protective covers

The installation may only be carried out by an expert!

All statements without guarantee!

1. Please remove the battery before working on your bicycle!


Remove the two front fastening screws (1+2) of the motor and slightly loosen the third one (3). This screw serves as a „hinge“ for folding down the motor.



2. It is possible that your motor is attached to more screws of further covers. These must be removed as well. (See example, one screw on the left and right of each arrow):



- 3.** When the motor is folded down, expose the two connectors to the display (4-pole, white) and the speed sensor (3-pole, white) and unplug them. Therefore, please press the retaining tabs at the arrow-marked sites.

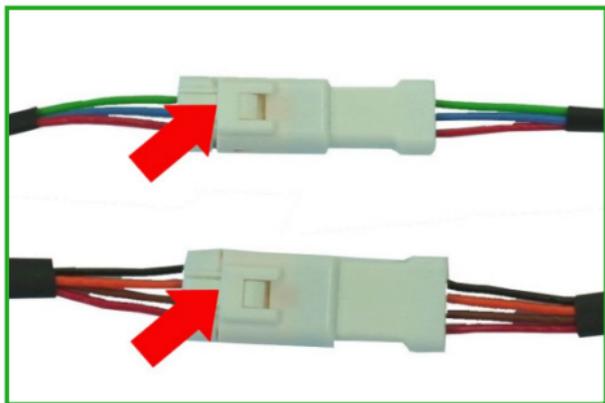

- 4.** Connect the bikespeed-RS by plugging in between the two separated (step 3) connectors. Please make sure that all 4 connections are locked correctly.

Store your bikespeed-RS with the connectors into the frame tube upwards to the display. Make sure the cables and connectors stored properly so that they cannot be squeezed while lifting the motor.

Lift the motor again and screw it in reverse order. Look to it while tightening the motor screws to the specified torque of the manufacturer. (Usually 22 Nm)

Hint for water protection

The opening in the housing is by design, so that any water can quickly drain and dry. Of course, the electronic is protected with a splash proof sealing.

For the success of drying the opening should be placed downwards. If this is not possible, we recommend additional water protection. (e.g., finger of a one-way-glove)

Hint for disposal

Electric and electronic devices that have become waste are called old devices. Owners of such old devices must bring these to recycling facilities, where these are handled and recorded separately from urban solid waste. Old devices must not end up in the household refuse. In fact, they must be collected in special collecting and recycling systems.

Owners of old devices from private households can dispose these at the public waste disposal authorities or bring them to producer or seller related disposal locations. You can find these disposal locations online:

<https://www.ear-system.de/ear-verzeichnis/sammel-und-ruecknahmestellen.jsf>

The labelled symbol showing the „crossed out waste container“ on electric and electronic equipment indicates that the concerning equipment has to be disposed separately from urban solid waste.



As a producer in terms of the German ElektroG we are registered with the German registration authority Stiftung Elektro-Altgeräte-Register (Benno-Strauß-Str. 1, 90763 Fürth), having been granted the following WEEE registration number: **DE 87104747**

As well at the Elektro Recycling Austria (ERA) GmbH with contract number: **40624**

EG Konformitätserklärung / EU Declaration of Conformity

Wir, die Firma

We, the company

bikespeed GmbH

Huberstr. 17

97084 Würzburg

erklären in eigener Verantwortung, dass das weiter unten aufgeführte Produkt

declare under our sole responsibility that the following product

Geräteart / Type of Product:

Tuningkit

Modell

bikespeed-RS

weitere Angaben

für Yamaha Motoren

die grundlegenden Anforderungen der aufgeführten EU-Richtlinien erfüllt:

2014/30/EU

Richtlinie über die elektromagnetische
Verträglichkeit

2011/65/EU

Richtlinie zur Beschränkung bestimmter
gefährlicher Stoffe in Elektro- und Elektronikgeräten

2006/42/EG

Maschinenrichtlinie

meets the essential requirements of the following EU-Directives:

2014/30/EU	Directive on Electromagnetic Compatibility
2011/65/EU	Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment
2006/42/EC	Machinery directive

angewandte Standards und Verordnungen / applied standards and regulations:

EN 15194:2017
EN 12100:2011
EN 62321:2009
EN 61000-3-2:2014
EN 61000-3-3:2013

Bevollmächtigter zur Zusammenstellung der technischen Unterlagen:

Authorized person for technical documentation:

Name/Name, Position:

Matthias Braun, CEO

Würzburg,

01.05.2014



Datum / Date

Unterschrift / Signature